


19" IR Touch Open Frame Monitor



Specification		
LCD Panel	Type No.	19 Inches TFT
	Pixel Pitch	0.098 * RGB (H) * 0.294 (V) mm
	Display Color	16.2 M
	Pixel Format	1,280 (H) * 1,024 (V)
	Viewing Angle	R/L 140 (Typ.), U/D 140 (Typ.)
	Response Time	8 ms (Typ.)
	Surface Luminance	300 cd/m ²
Input Signal	Analog	Analog RGB(0.7Vp-p, 75ohm)
	Digital	DVI-D
Scanning Frequency	H-Sync.	31 ~ 80 KHz
	V-Sync.	57 ~ 75Hz
OSD Key		Power/Indicator LED, Up, Down, Select, Menu
Audio (Optional)	In	2Watt (L) + 2Watt (R)
	Out	Headphone Jack
Plug & Play		DDC 1/2B
IR Touch	Touch Resolution	16,384 (H) * 16,384(V)
	Response Time	10 ms (Max.)
	Interface	RS232(C) / USB
	Thickness of Glass	3.2mm
Monitor Power	DC Input	12V / 3.5A (Adaptor)
	Max. Consumption	33W
	Management	VESA DPMS
Weight / Dimension		TBD

* Features and specifications are subject to change without notice

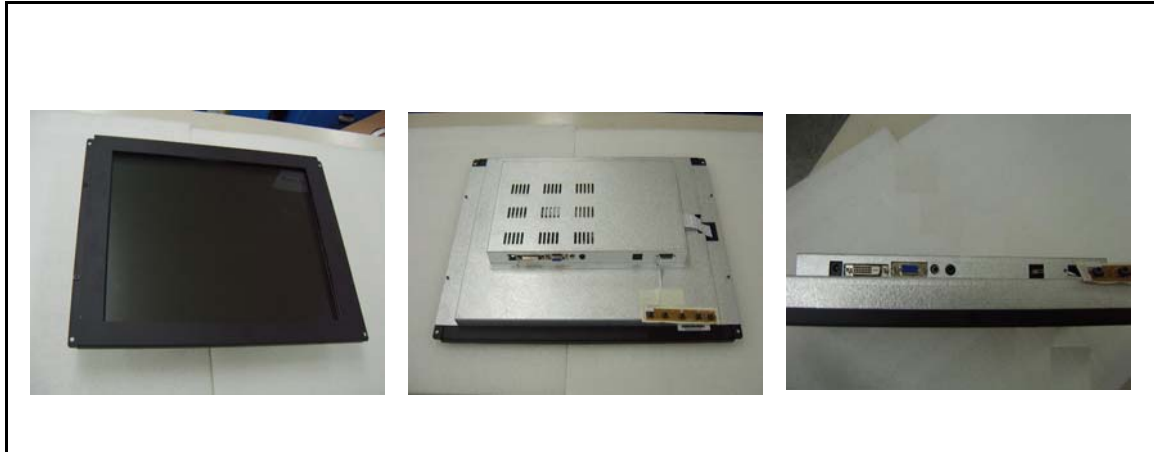